


Conducted EMI Test Report

Common Information

EMI Test Receiver	Rohde & Schwarz ESL6
Line Imp. Stabilization Network	Rohde & Schwarz ENV216
EMI Measurement Software	Rohde & Schwarz EMC32
.	
Sold by	Teknikproffset.se
Device Under Test	38-19469 GU10 185 lm. 2,5W
Brand or Manufacturer	Unknown
Model	38-19469
Operating Conditions	20 degrees Celsius
Operator Name	Oti
Comment	

Full Spectrum

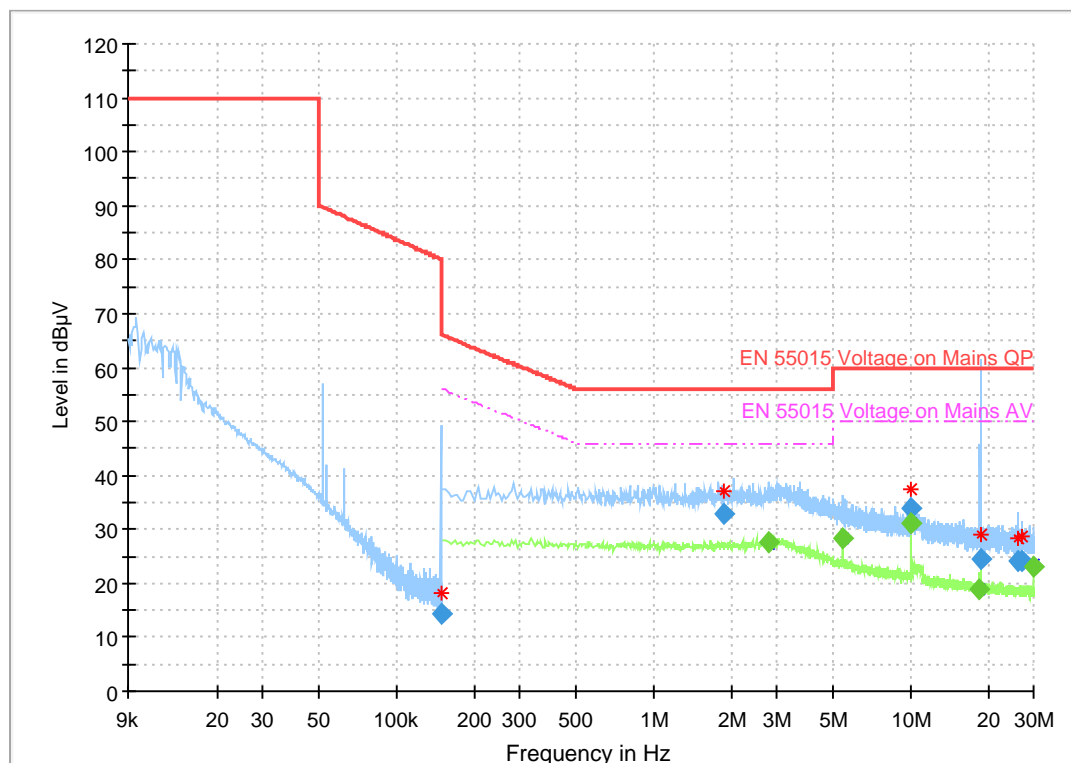

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)	Comment
0.149000	14.26	80.06	65.80	1000.0	0.200	L1	OFF	10.0	
1.864500	33.03	56.00	22.97	1000.0	9.000	L1	OFF	10.0	
2.773500	---	46.00	18.49	1000.0	9.000	N	OFF	10.0	
5.410500	---	50.00	21.74	1000.0	9.000	L1	OFF	10.0	
10.000500	34.03	60.00	25.97	1000.0	9.000	L1	OFF	10.0	
10.000500	---	50.00	18.82	1000.0	9.000	L1	OFF	10.0	
18.501000	---	50.00	31.19	1000.0	9.000	N	OFF	10.0	
18.676500	24.61	60.00	35.39	1000.0	9.000	L1	OFF	10.0	
25.881000	24.14	60.00	35.86	1000.0	9.000	N	OFF	10.0	
27.033000	24.27	60.00	35.73	1000.0	9.000	N	OFF	10.0	
30.000000	---	50.00	26.82	1000.0	9.000	N	OFF	10.0	



Actual test setup