


# Conducted EMI Test Report

## Common Information

EMI Test Receiver	Rohde & Schwarz ESL6
Line Imp. Stabilization Network	Rohde & Schwarz ENV216
EMI Measurement Software	Rohde & Schwarz EMC32
.	
Sold by	Teknikproffset.se
Device Under Test	38-21206 Dimbar LED 1055 lm. 13W
Brand or Manufacturer	Unknown
Model	38-21206
Operating Conditions	20 degrees Celsius
Operator Name	Oti
Comment	

Full Spectrum

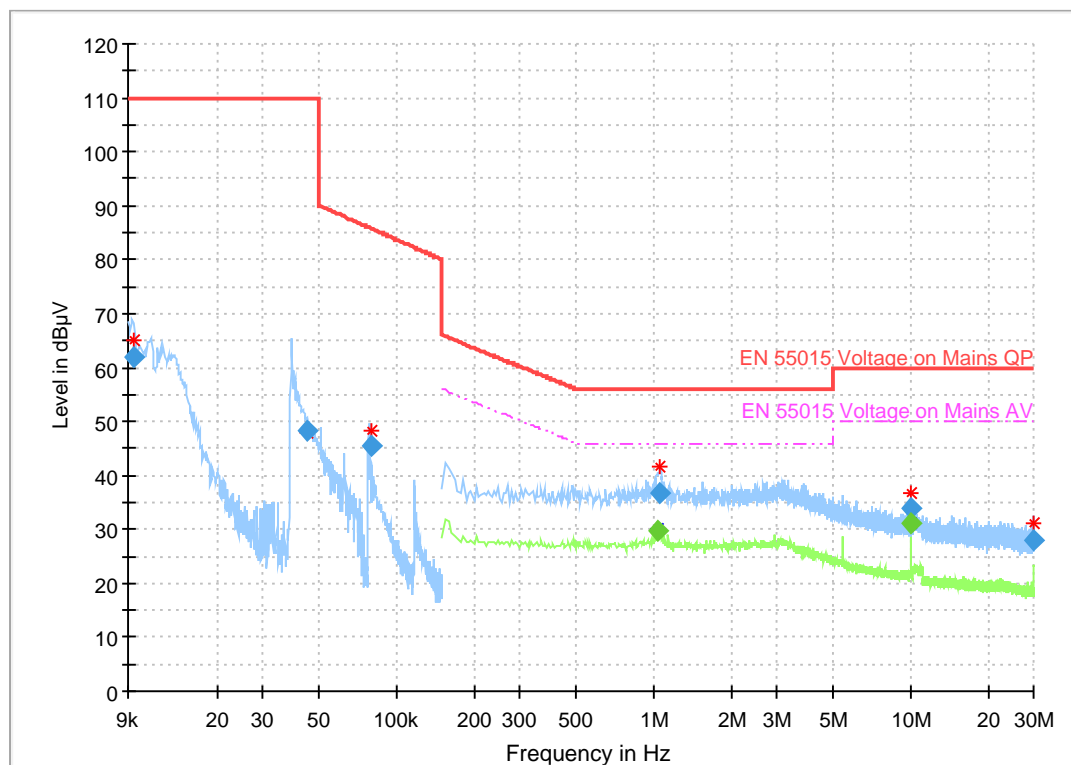

## Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)	Comment
0.009500	61.86	110.00	48.14	1000.0	0.200	L1	OFF	10.0	
0.044600	48.30	110.00	61.70	1000.0	0.200	N	OFF	10.0	
0.079500	45.40	85.78	40.38	1000.0	0.200	N	OFF	10.0	
1.032000	---	46.00	16.16	1000.0	9.000	L1	OFF	10.0	
1.050000	36.80	56.00	19.20	1000.0	9.000	L1	OFF	10.0	
10.000500	33.86	60.00	26.14	1000.0	9.000	L1	OFF	10.0	
10.000500	---	50.00	18.88	1000.0	9.000	L1	OFF	10.0	
30.000000	27.94	60.00	32.06	1000.0	9.000	L1	OFF	10.0	



Actual test setup