


Conducted EMI Test Report

Common Information

EMI Test Receiver	Rohde & Schwarz ESL6
Line Imp. Stabilization Network	Rohde & Schwarz ENV216
EMI Measurement Software	Rohde & Schwarz EMC32
.	
Sold by	Teknikproffset.se
Device Under Test	38-23717 DELTACO LED 190 lm. 3W
Brand or Manufacturer	Deltaco
Model	38-23717
Operating Conditions	20 degrees Celsius
Operator Name	Oti
Comment	

Full Spectrum

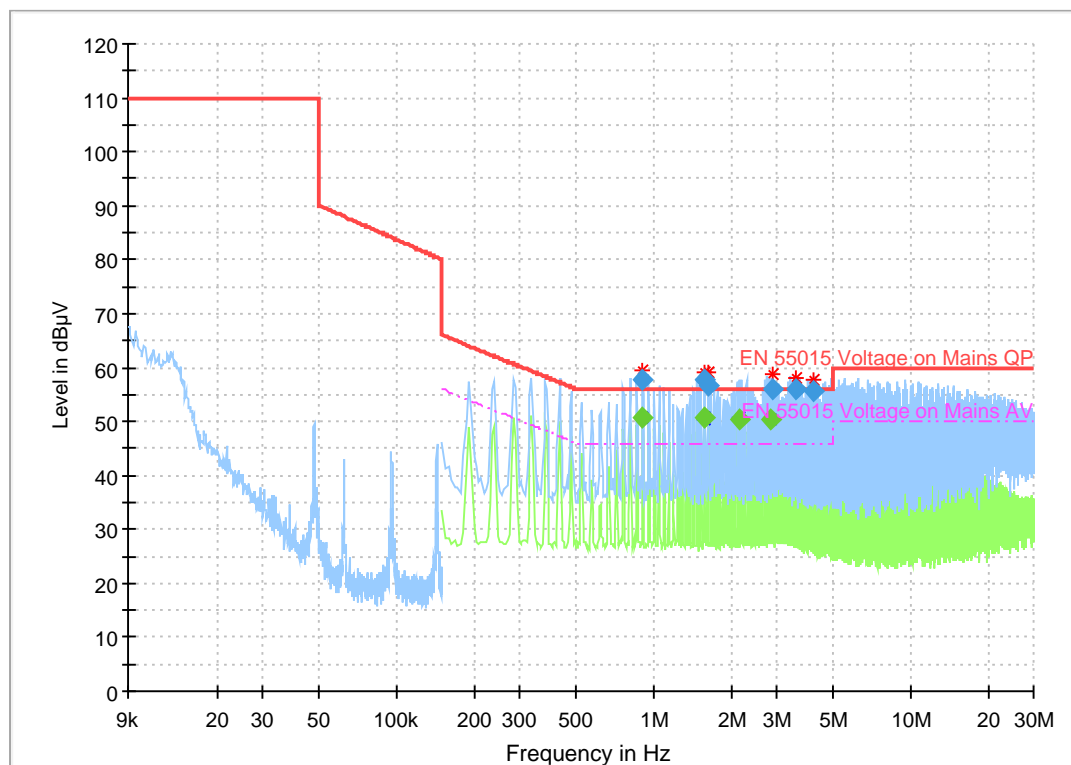

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)	Comment
0.906000	---	46.00	-4.79	1000.0	9.000	N	OFF	10.0	
0.906000	57.71	56.00	-1.71	1000.0	9.000	L1	OFF	10.0	
1.572000	---	46.00	-4.87	1000.0	9.000	N	OFF	10.0	
1.572000	57.58	56.00	-1.58	1000.0	9.000	L1	OFF	10.0	
1.621500	56.85	56.00	-0.85	1000.0	9.000	L1	OFF	10.0	
2.143500	---	46.00	-4.55	1000.0	9.000	N	OFF	10.0	
2.859000	---	46.00	-4.31	1000.0	9.000	N	OFF	10.0	
2.908500	55.93	56.00	0.07	1000.0	9.000	L1	OFF	10.0	
3.574500	55.84	56.00	0.16	1000.0	9.000	L1	OFF	10.0	
4.195500	55.57	56.00	0.43	1000.0	9.000	L1	OFF	10.0	



Actual test setup