


Conducted EMI Test Report

Common Information

EMI Test Receiver	Rohde & Schwarz ESL6
Line Imp. Stabilization Network	Rohde & Schwarz ENV216
EMI Measurement Software	Rohde & Schwarz EMC32
.	
Sold by	Teknikproffset.se
Device Under Test	38-23718 Dimbar LED 806 lm. 10W
Brand or Manufacturer	Unknown
Model	38-23718
Operating Conditions	20 degrees Celsius
Operator Name	Oti
Comment	

Full Spectrum

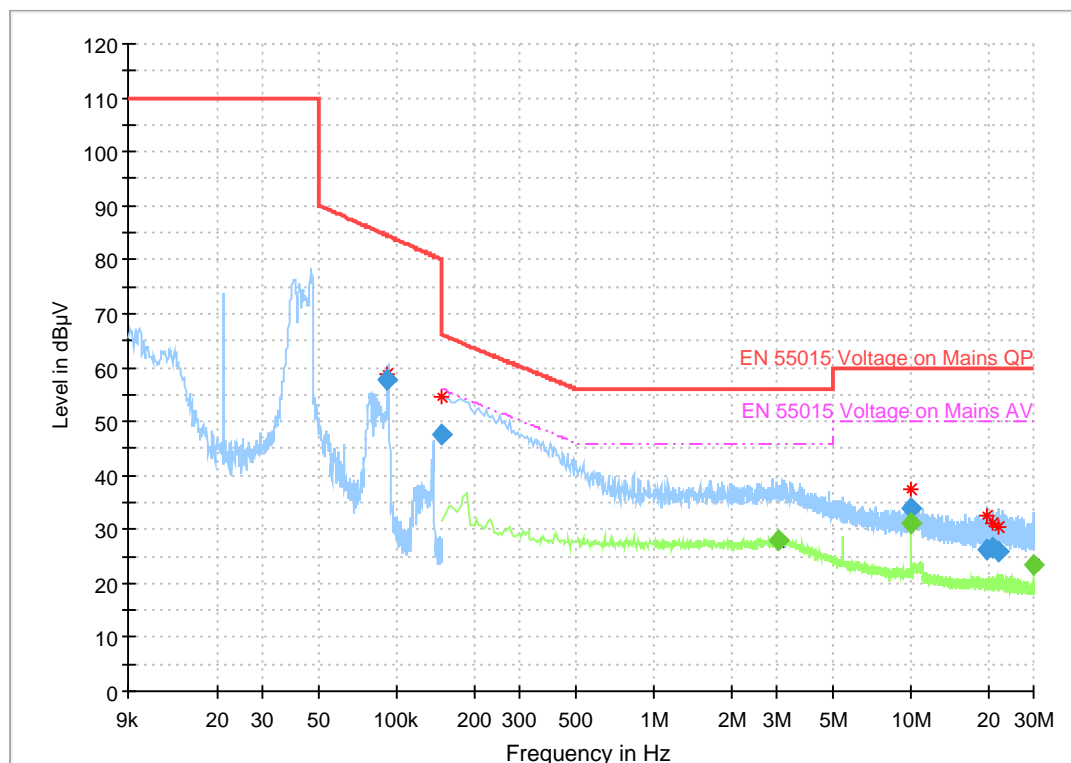

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)	Comment
0.092100	57.62	84.44	26.82	1000.0	0.200	N	OFF	10.0	
0.150000	47.71	80.00	32.29	1000.0	9.000	N	OFF	10.0	
3.048000	---	46.00	18.06	1000.0	9.000	N	OFF	10.0	
10.000500	34.09	60.00	25.91	1000.0	9.000	L1	OFF	10.0	
10.000500	---	50.00	18.84	1000.0	9.000	N	OFF	10.0	
19.747500	26.18	60.00	33.82	1000.0	9.000	N	OFF	10.0	
20.841000	26.49	60.00	33.51	1000.0	9.000	L1	OFF	10.0	
21.817500	25.86	60.00	34.14	1000.0	9.000	L1	OFF	10.0	
30.000000	---	50.00	26.60	1000.0	9.000	N	OFF	10.0	



Actual test setup