


# Conducted EMI Test Report

## Common Information

EMI Test Receiver	Rohde & Schwarz ESL6
Line Imp. Stabilization Network	Rohde & Schwarz ENV216
EMI Measurement Software	Rohde & Schwarz EMC32
.	
Sold by	Teknikproffset.se
Device Under Test	38-21205 Dimbar LED 470 lm. 6,5W
Brand or Manufacturer	Unknown
Model	38-21205
Operating Conditions	20 degrees Celsius
Operator Name	Oti
Comment	

Full Spectrum

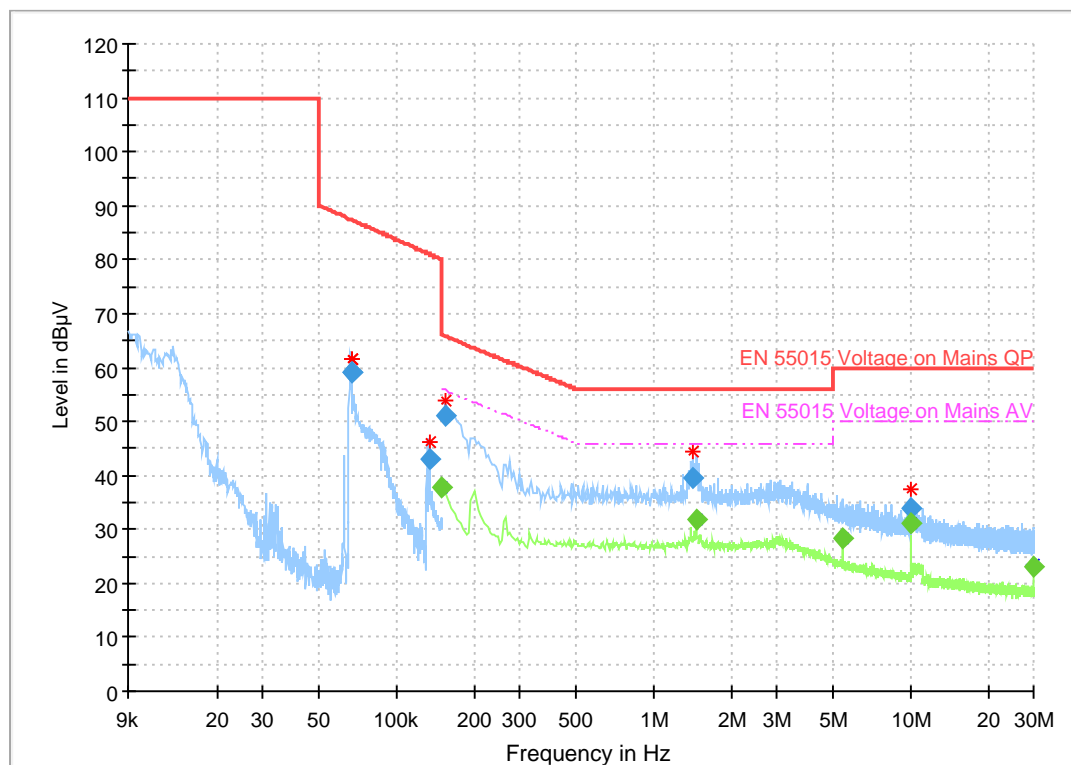

## Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)	Comment
0.066700	59.07	87.38	28.31	1000.0	0.200	L1	OFF	10.0	
0.066800	59.06	87.36	28.30	1000.0	0.200	N	OFF	10.0	
0.133300	42.91	81.07	38.16	1000.0	0.200	L1	OFF	10.0	
0.150000	---	56.00	18.22	1000.0	9.000	L1	OFF	10.0	
0.154500	50.98	65.75	14.77	1000.0	9.000	L1	OFF	10.0	
1.428000	39.37	56.00	16.63	1000.0	9.000	L1	OFF	10.0	
1.468500	---	46.00	14.29	1000.0	9.000	L1	OFF	10.0	
5.415000	---	50.00	21.63	1000.0	9.000	L1	OFF	10.0	
10.000500	---	50.00	18.94	1000.0	9.000	L1	OFF	10.0	
10.000500	33.87	60.00	26.13	1000.0	9.000	L1	OFF	10.0	
30.000000	---	50.00	26.94	1000.0	9.000	N	OFF	10.0	



Actual test setup