


# Conducted EMI Test Report

## Common Information

EMI Test Receiver	Rohde & Schwarz ESL6
Line Imp. Stabilization Network	Rohde & Schwarz ENV216
EMI Measurement Software	Rohde & Schwarz EMC32
.	
Sold by	Teknikproffset.se
Device Under Test	38-23729 Dimbar LED 810 lm. 10W
Brand or Manufacturer	Unknown
Model	38-23729
Operating Conditions	20 degrees Celsius
Operator Name	Oti
Comment	

Full Spectrum

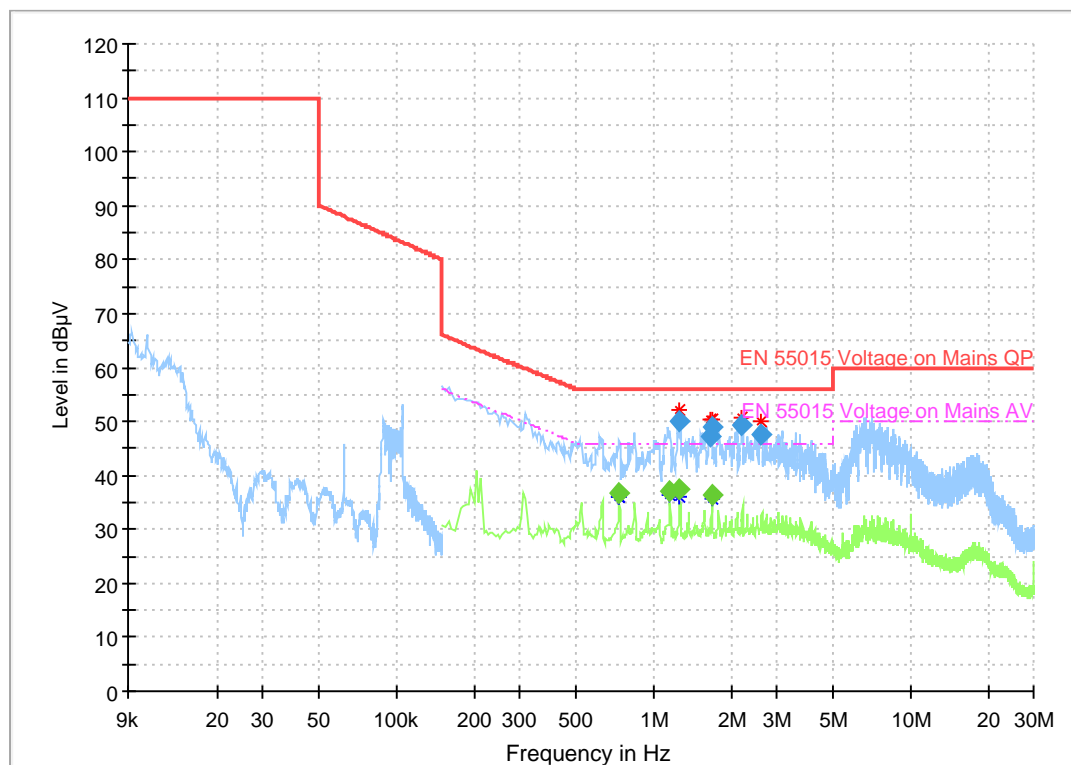

## Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)	Comment
0.735000	---	46.00	9.21	1000.0	9.000	L1	OFF	10.0	
1.153500	---	46.00	9.06	1000.0	9.000	L1	OFF	10.0	
1.261500	---	46.00	8.62	1000.0	9.000	L1	OFF	10.0	
1.261500	50.11	56.00	5.89	1000.0	9.000	L1	OFF	10.0	
1.662000	47.12	56.00	8.88	1000.0	9.000	L1	OFF	10.0	
1.680000	48.92	56.00	7.08	1000.0	9.000	L1	OFF	10.0	
1.680000	---	46.00	9.56	1000.0	9.000	L1	OFF	10.0	
2.206500	49.30	56.00	6.70	1000.0	9.000	L1	OFF	10.0	
2.625000	47.70	56.00	8.30	1000.0	9.000	L1	OFF	10.0	



Actual test setup