


Conducted EMI Test Report

Common Information

EMI Test Receiver Rohde & Schwarz ESL6
 Line Imp. Stabilization Network Rohde & Schwarz ENV216
 EMI Measurement Software Rohde & Schwarz EMC32

Sold by Teknikproffset.se
 Device Under Test 38-5528 RGB LED-bulb
 Brand or Manufacturer Technaxx
 Model 38-5528
 Operating Conditions 20 degrees Celsius
 Operator Name Oti
 Comment

Full Spectrum

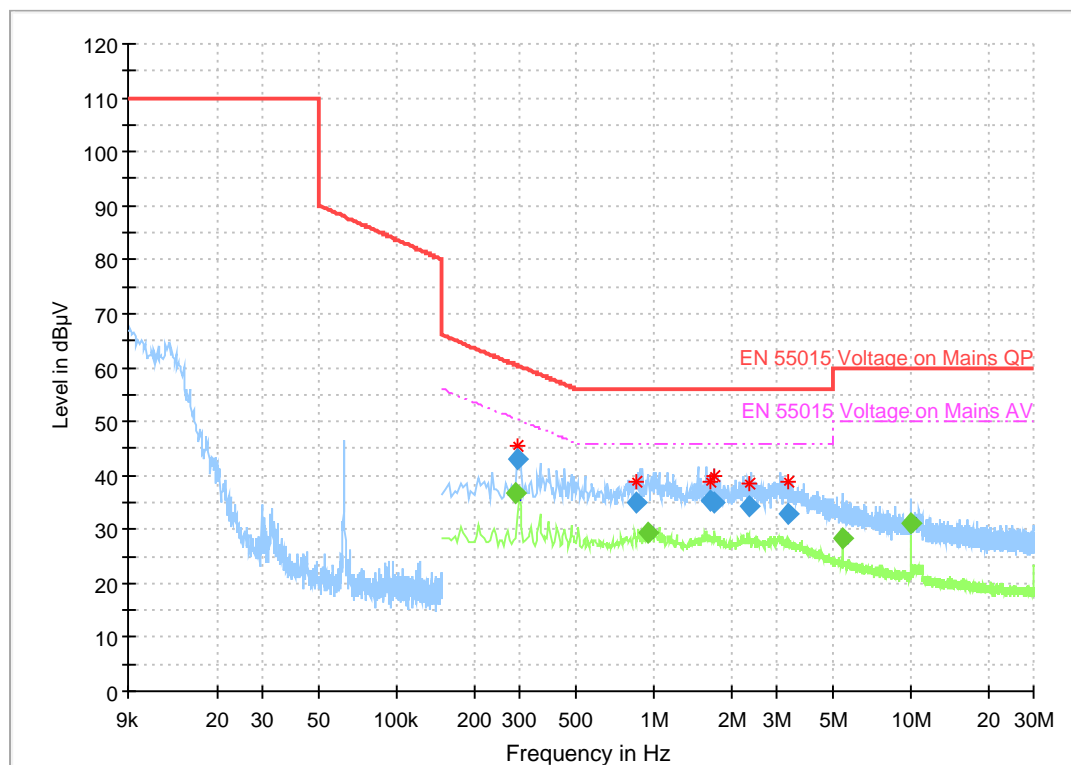

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)	Comment
0.289500	---	50.54	13.73	1000.0	9.000	L1	OFF	10.0	
0.294000	43.13	60.41	17.28	1000.0	9.000	L1	OFF	10.0	
0.856500	34.93	56.00	21.07	1000.0	9.000	L1	OFF	10.0	
0.951000	---	46.00	16.63	1000.0	9.000	L1	OFF	10.0	
1.644000	35.41	56.00	20.59	1000.0	9.000	L1	OFF	10.0	
1.725000	34.93	56.00	21.07	1000.0	9.000	L1	OFF	10.0	
2.337000	34.38	56.00	21.62	1000.0	9.000	L1	OFF	10.0	
3.322500	32.96	56.00	23.04	1000.0	9.000	N	OFF	10.0	
5.410500	---	50.00	21.64	1000.0	9.000	N	OFF	10.0	
10.000500	---	50.00	18.95	1000.0	9.000	N	OFF	10.0	



Actual test setup