


# Conducted EMI Test Report

## Common Information

EMI Test Receiver	Rohde & Schwarz ESL6
Line Imp. Stabilization Network	Rohde & Schwarz ENV216
EMI Measurement Software	Rohde & Schwarz EMC32
.	
Sold by	Teknikproffset.se
Device Under Test	38-5631 Verbatim 440 lm, 9W, dimbar
Brand or Manufacturer	Verbatim
Model	38-5631
Operating Conditions	20 degrees Celsius
Operator Name	Oti
Comment	

Full Spectrum

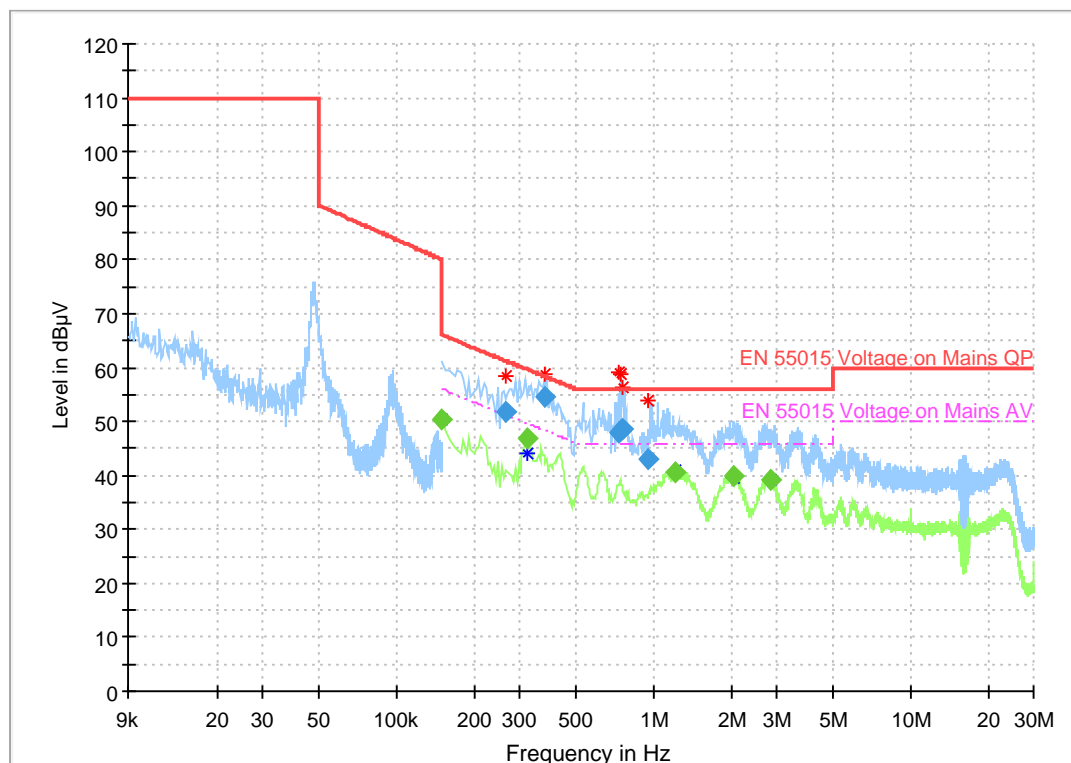

## Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)	Comment
0.150000	---	56.00	5.53	1000.0	9.000	L1	OFF	10.0	
0.267000	51.89	61.21	9.32	1000.0	9.000	L1	OFF	10.0	
0.321000	---	49.68	2.95	1000.0	9.000	L1	OFF	10.0	
0.379500	54.44	58.29	3.85	1000.0	9.000	L1	OFF	10.0	
0.735000	47.95	56.00	8.05	1000.0	9.000	L1	OFF	10.0	
0.748500	48.43	56.00	7.57	1000.0	9.000	L1	OFF	10.0	
0.753000	48.46	56.00	7.54	1000.0	9.000	L1	OFF	10.0	
0.955500	42.86	56.00	13.14	1000.0	9.000	L1	OFF	10.0	
1.212000	---	46.00	5.34	1000.0	9.000	L1	OFF	10.0	
2.026500	---	46.00	6.02	1000.0	9.000	L1	OFF	10.0	
2.863500	---	46.00	6.89	1000.0	9.000	L1	OFF	10.0	



Actual test setup