


Conducted EMI Test Report

Common Information

EMI Test Receiver	Rohde & Schwarz ESL6
Line Imp. Stabilization Network	Rohde & Schwarz ENV216
EMI Measurement Software	Rohde & Schwarz EMC32
.	
Sold by	Teknikproffset.se
Device Under Test	38-5652 MR16 GU5.3 160lm. 2W
Brand or Manufacturer	Unknown
Model	38-5652
Operating Conditions	20 degrees Celsius
Operator Name	Oti
Comment	

Full Spectrum

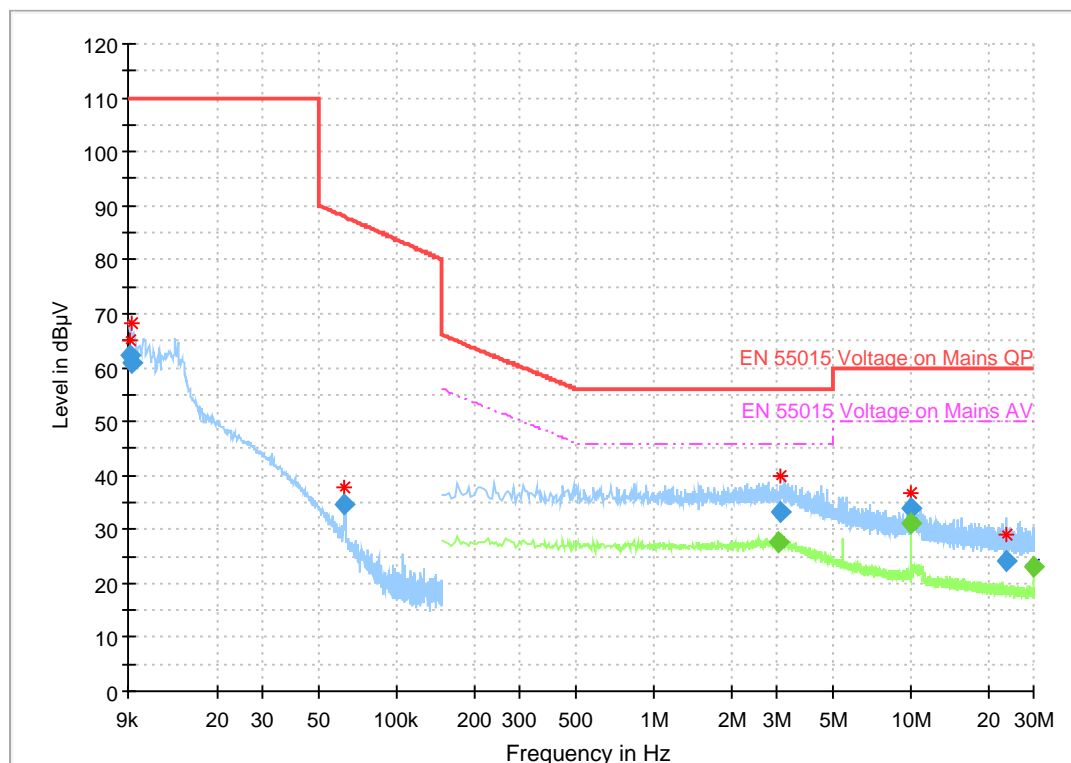

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)	Comment
0.009200	62.14	110.00	47.86	1000.0	0.200	L1	OFF	10.0	
0.009300	60.89	110.00	49.11	1000.0	0.200	N	OFF	10.0	
0.062300	34.65	88.00	53.35	1000.0	0.200	N	OFF	10.0	
3.061500	---	46.00	18.47	1000.0	9.000	N	OFF	10.0	
3.124500	33.37	56.00	22.63	1000.0	9.000	N	OFF	10.0	
10.000500	---	50.00	18.81	1000.0	9.000	L1	OFF	10.0	
10.000500	33.94	60.00	26.06	1000.0	9.000	N	OFF	10.0	
23.298000	24.24	60.00	35.76	1000.0	9.000	N	OFF	10.0	
30.000000	---	50.00	26.82	1000.0	9.000	N	OFF	10.0	



Actual test setup